


FI/FB/WCS

SPECIAL EDITION CONVENTIONAL SOUNDER



Features :

The FI/FB/WCS is a low consumption sounder designed to be used as an unobtrusive low profile wall. This improves the aesthetics of the Fire Alarm system. Four different tones are available and selected by jumpers. The sound level can be adjusted if required using the potentiometer.

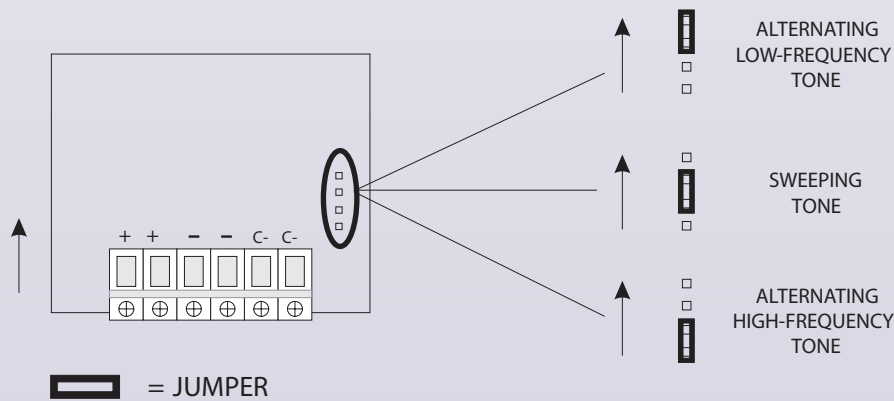

NOTE : TO OBTAIN CONTINUOUS TONE
CONNECT 0V TO C- TERMINALS (SHORT BETWEEN - AND C-)

SPECIFICATIONS			
SUPPLY	17-40 V DC	DIMENSIONS	Dia: 100mm H: 67mm
CURRENT QUIESCENT	0.9mA	WEIGHT	125 grams
CURRENT ALARM	3.5mA	OPERATING TEMPERATURE	0-40°C
MAX CABLE SIZE	2.5 mm ²	HUMIDITY	85% RH Non-condensing
SOUND OUTPUT - Continuous/Sweep/Alternating LF	85dB @ 1 metre	PROTECTION CATEGORY	Ip44
SOUND OUTPUT - Alternating HF	92dB @ 1 metre	ORDERING INFORMATION	FI/FB/WCS