


CQR's range of POWER SUPPLIES




Box Type	Box A	Box B	Box C
Size	230 x 170 x 100	260 x 320 x 100	400 x 425 x 100
Weight	2.0 kg	3.5 kg	4.5 kg
Max No. of Batteries (12V 7AH)	1	2	3

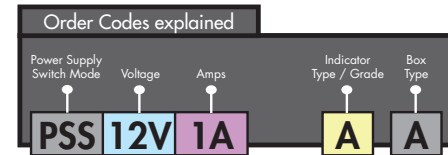


		Rate Output	Output Voltage (DC)	Output Fuse	Output Ripple	Operating Temperature	Battery Learn	Battery Recharge Time	Battery Fuse	Reverse Battery Protection	Deep Discharge Protection	Battery Low Voltage Monitoring	Battery Load Test Monitoring	Over Voltage Protection	Over Current Protection	EPS Fault Relay and LED	APS fault Relay and LED	PSU Fault Relay and LED	AC 'On' Indicator	Standby Indicator	12V Output Fuse fault indicator
Single Indicator	PSS12V1A/SI/box size	1 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓		
	PSS12V2A/SI/box size	2 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓		
	PSS24V2A/SI/box size	2 Amp	27.4	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓		
	PSS12V3A/SI/box size	3 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓		
	PSS24V3A/SI/B	3 Amp	27.4	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓		
	PSS12V5A/SI/box size	5 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓		
Multi Indicator	PSS12V1A/MI/box size	1 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓	✓	✓
	PSS12V2A/MI/box size	2 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓	✓	✓
	PSS12V3A/MI/box size	3 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓	✓	✓
	PSS12V5A/MI/box size	5 Amp	13.7	Self Resetting	<100mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓			✓	✓				✓	✓	✓
EN Grade 2	PSS12V1A/G2/box size	1 Amp	13.7	Self Resetting	<50mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓	✓		✓	✓	✓	✓				
	PSS12V2A/G2/box size	2 Amp	13.7	Self Resetting	<50mV	-10°C to +44°C		<72hrs	Self Resetting	✓	✓	✓		✓	✓	✓	✓				
EN Grade 3	PSS12V1A/G3/box size	1 Amp	13.7	Self Resetting	<50mV	-10°C to +44°C	✓	<24hrs	Self Resetting	✓	✓	✓	✓	✓	✓	✓	✓	✓			
	PSS24V1A/G3/C	1 Amp	27.4	Self Resetting	<50mV	-10°C to +44°C	✓	<24hrs	Self Resetting	✓	✓	✓	✓	✓	✓	✓	✓	✓			
	PSS12V2A/G3/box size	2 Amp	13.7	Self Resetting	<50mV	-10°C to +44°C	✓	<24hrs	Self Resetting	✓	✓	✓	✓	✓	✓	✓	✓	✓			



www.cqr.co.uk info@cqr.co.uk Sales: 0151 606 1000 Tech: 0151 606 6311
CQR Fire & Security, 125 Pasture Road, Moreton, Wirral, CH46 4TH, UK



PSS/SPLITTER/8
8 Way Splitter



PSS/SPLITTER/4BNC
4 Way Splitter